



### 12mm tempered glass specification :


Thickness	3mm, 4mm, 5mm, 6mm,8mm,10mm,12mm
Size	914*1220mm 650*1875mm etc Min. size: 200 x 200mm, max size: 2400 x 7000mm or customized
OEM service	Available in shape, size,color,brand etc.
Beveled edge	round edge(also named as C-edge, pencil edge), flat edge
Description	high quality clear building safe tempered glass is 4-5 times stronger than annealed glass of equal thickness. When broken,the injury to the human body has been reduced greatly
Prodcution process	1.Cutting : cutting the annealing glass to the actual needs of shape. 2.Glass edging: Edging machine to mill the four edges to prevent frund when steeling,while maintaining the beautiful appearance. 3.Drilling hole:If need to drilling hole using drilling machine. 4.Washing dry:cleaning the glass with washing machine. 5. Tempered glass:Tempered glass is produced by heating annealed glass in a furnace to 700°,then the glass is rapidly cooled with jets of cold air to 40°,through the procedures, the original glass is formed of tempered glass
Application	Office door glass , building glass ,window glass , carton glass , partition wall glass ,etc

### Tempered glass pictures :

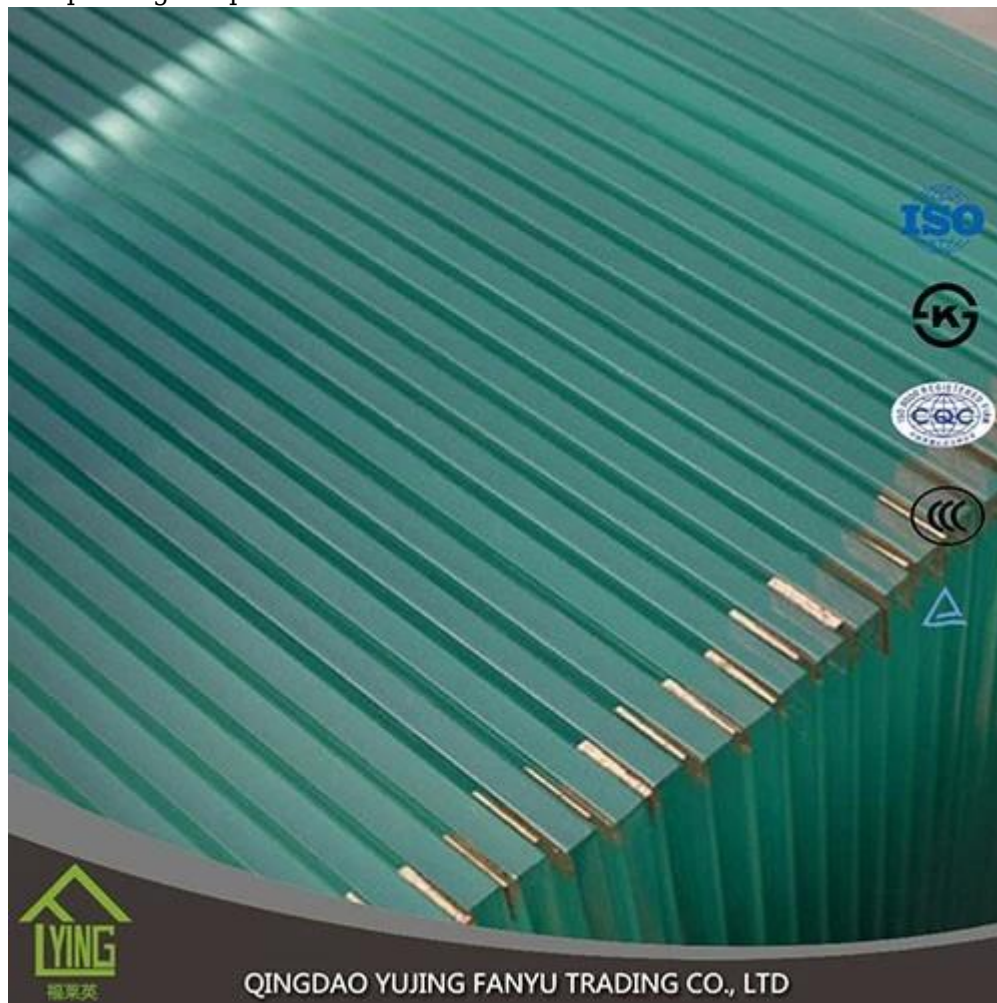

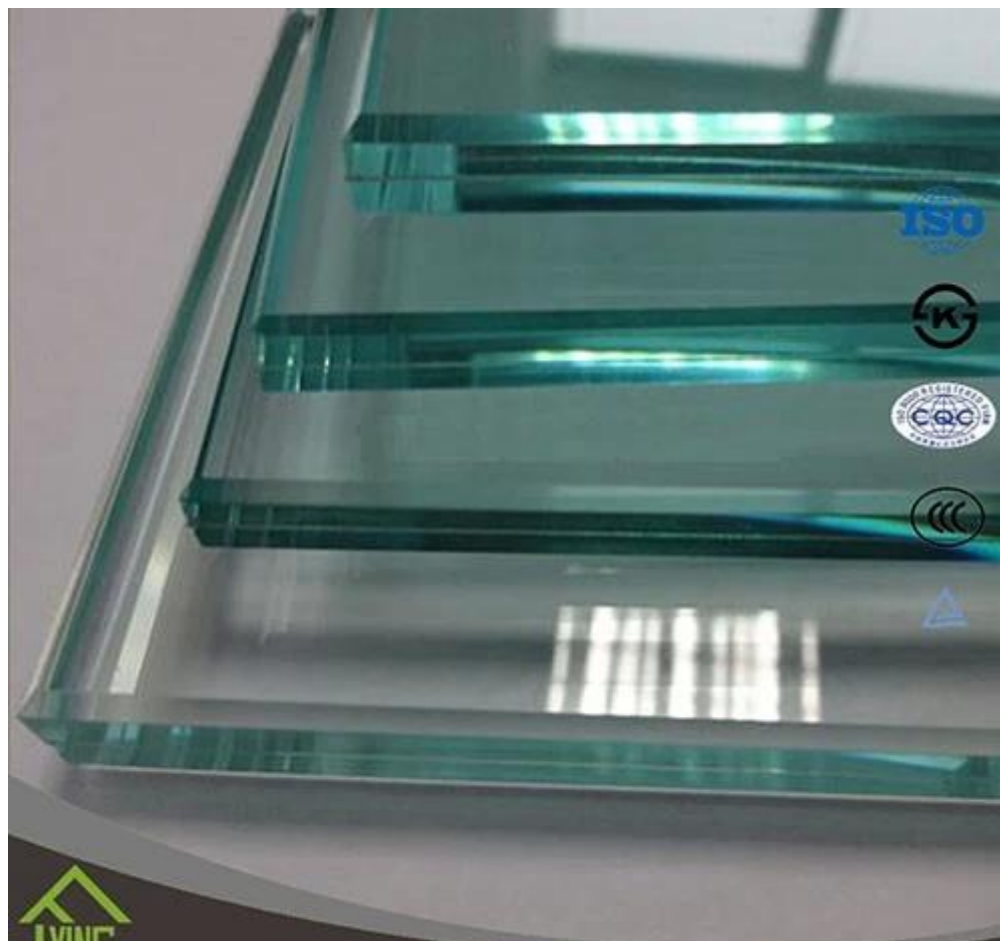

QINGDAO YUJING FANYU TRADING CO., LTD

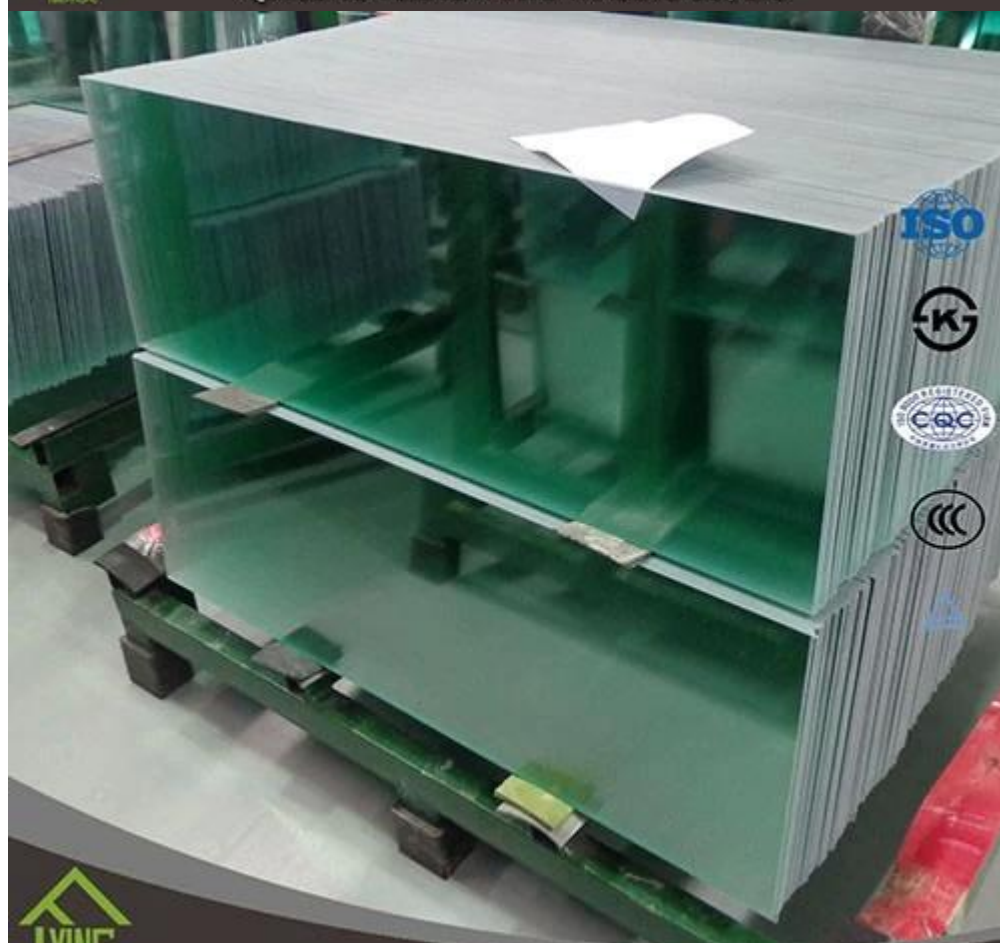

QINGDAO YUJING FANYU TRADING CO., LTD