

safety glass laminated glass manufacturer in China



Clear laminated glass specification :

By most building codes, laminated glass is considered "safety glass." While it can be broken, fragments usually adhere to the plastic layers, reducing injury risks. If desired (or required), laminated glass can be further strengthened by manufacturing it with units of heat-strengthened or tempered glass.

Thickness	0.28mm, 0.38mm, 0.48mm, 0.58mm, 0.68mm, 0.78mm, 0.88mm, 0.98mm, 1.08mm, 1.18mm, 1.28mm, 1.38mm, 1.48mm, 1.58mm, 1.68mm, 1.78mm, 1.88mm, 1.98mm, 2.08mm, 2.18mm, 2.28mm, 2.38mm, 2.48mm, 2.58mm, 2.68mm, 2.78mm, 2.88mm, 2.98mm, 3.08mm, 3.18mm, 3.28mm, 3.38mm, 3.48mm, 3.58mm, 3.68mm, 3.78mm, 3.88mm, 3.98mm, 4.08mm, 4.18mm, 4.28mm, 4.38mm, 4.48mm, 4.58mm, 4.68mm, 4.78mm, 4.88mm, 4.98mm, 5.08mm, 5.18mm, 5.28mm, 5.38mm, 5.48mm, 5.58mm, 5.68mm, 5.78mm, 5.88mm, 5.98mm, 6.08mm, 6.18mm, 6.28mm, 6.38mm, 6.48mm, 6.58mm, 6.68mm, 6.78mm, 6.88mm, 6.98mm, 7.08mm, 7.18mm, 7.28mm, 7.38mm, 7.48mm, 7.58mm, 7.68mm, 7.78mm, 7.88mm, 7.98mm, 8.08mm, 8.18mm, 8.28mm, 8.38mm, 8.48mm, 8.58mm, 8.68mm, 8.78mm, 8.88mm, 8.98mm, 9.08mm, 9.18mm, 9.28mm, 9.38mm, 9.48mm, 9.58mm, 9.68mm, 9.78mm, 9.88mm, 9.98mm, 10.08mm, 10.18mm, 10.28mm, 10.38mm, 10.48mm, 10.58mm, 10.68mm, 10.78mm, 10.88mm, 10.98mm, 11.08mm, 11.18mm, 11.28mm, 11.38mm, 11.48mm, 11.58mm, 11.68mm, 11.78mm, 11.88mm, 11.98mm, 12.08mm, 12.18mm, 12.28mm, 12.38mm, 12.48mm, 12.58mm, 12.68mm, 12.78mm, 12.88mm, 12.98mm, 13.08mm, 13.18mm, 13.28mm, 13.38mm, 13.48mm, 13.58mm, 13.68mm, 13.78mm, 13.88mm, 13.98mm, 14.08mm, 14.18mm, 14.28mm, 14.38mm, 14.48mm, 14.58mm, 14.68mm, 14.78mm, 14.88mm, 14.98mm, 15.08mm, 15.18mm, 15.28mm, 15.38mm, 15.48mm, 15.58mm, 15.68mm, 15.78mm, 15.88mm, 15.98mm, 16.08mm, 16.18mm, 16.28mm, 16.38mm, 16.48mm, 16.58mm, 16.68mm, 16.78mm, 16.88mm, 16.98mm, 17.08mm, 17.18mm, 17.28mm, 17.38mm, 17.48mm, 17.58mm, 17.68mm, 17.78mm, 17.88mm, 17.98mm, 18.08mm, 18.18mm, 18.28mm, 18.38mm, 18.48mm, 18.58mm, 18.68mm, 18.78mm, 18.88mm, 18.98mm, 19.08mm, 19.18mm, 19.28mm, 19.38mm, 19.48mm, 19.58mm, 19.68mm, 19.78mm, 19.88mm, 19.98mm, 20.08mm, 20.18mm, 20.28mm, 20.38mm, 20.48mm, 20.58mm, 20.68mm, 20.78mm, 20.88mm, 20.98mm, 21.08mm, 21.18mm, 21.28mm, 21.38mm, 21.48mm, 21.58mm, 21.68mm, 21.78mm, 21.88mm, 21.98mm, 22.08mm, 22.18mm, 22.28mm, 22.38mm, 22.48mm, 22.58mm, 22.68mm, 22.78mm, 22.88mm, 22.98mm, 23.08mm, 23.18mm, 23.28mm, 23.38mm, 23.48mm, 23.58mm, 23.68mm, 23.78mm, 23.88mm, 23.98mm, 24.08mm, 24.18mm, 24.28mm, 24.38mm, 24.48mm, 24.58mm, 24.68mm, 24.78mm, 24.88mm, 24.98mm, 25.08mm, 25.18mm, 25.28mm, 25.38mm, 25.48mm, 25.58mm, 25.68mm, 25.78mm, 25.88mm, 25.98mm, 26.08mm, 26.18mm, 26.28mm, 26.38mm, 26.48mm, 26.58mm, 26.68mm, 26.78mm, 26.88mm, 26.98mm, 27.08mm, 27.18mm, 27.28mm, 27.38mm, 27.48mm, 27.58mm, 27.68mm, 27.78mm, 27.88mm, 27.98mm, 28.08mm, 28.18mm, 28.28mm, 28.38mm, 28.48mm, 28.58mm, 28.68mm, 28.78mm, 28.88mm, 28.98mm, 29.08mm, 29.18mm, 29.28mm, 29.38mm, 29.48mm, 29.58mm, 29.68mm, 29.78mm, 29.88mm, 29.98mm, 30.08mm, 30.18mm, 30.28mm, 30.38mm, 30.48mm, 30.58mm, 30.68mm, 30.78mm, 30.88mm, 30.98mm, 31.08mm, 31.18mm, 31.28mm, 31.38mm, 31.48mm, 31.58mm, 31.68mm, 31.78mm, 31.88mm, 31.98mm, 32.08mm, 32.18mm, 32.28mm, 32.38mm, 32.48mm, 32.58mm, 32.68mm, 32.78mm, 32.88mm, 32.98mm, 33.08mm, 33.18mm, 33.28mm, 33.38mm, 33.48mm, 33.58mm, 33.68mm, 33.78mm, 33.88mm, 33.98mm, 34.08mm, 34.18mm, 34.28mm, 34.38mm, 34.48mm, 34.58mm, 34.68mm, 34.78mm, 34.88mm, 34.98mm, 35.08mm, 35.18mm, 35.28mm, 35.38mm, 35.48mm, 35.58mm, 35.68mm, 35.78mm, 35.88mm, 35.98mm, 36.08mm, 36.18mm, 36.28mm, 36.38mm, 36.48mm, 36.58mm, 36.68mm, 36.78mm, 36.88mm, 36.98mm, 37.08mm, 37.18mm, 37.28mm, 37.38mm, 37.48mm, 37.58mm, 37.68mm, 37.78mm, 37.88mm, 37.98mm, 38.08mm, 38.18mm, 38.28mm, 38.38mm, 38.48mm, 38.58mm, 38.68mm, 38.78mm, 38.88mm, 38.98mm, 39.08mm, 39.18mm, 39.28mm, 39.38mm, 39.48mm, 39.58mm, 39.68mm, 39.78mm, 39.88mm, 39.98mm, 40.08mm, 40.18mm, 40.28mm, 40.38mm, 40.48mm, 40.58mm, 40.68mm, 40.78mm, 40.88mm, 40.98mm, 41.08mm, 41.18mm, 41.28mm, 41.38mm, 41.48mm, 41.58mm, 41.68mm, 41.78mm, 41.88mm, 41.98mm, 42.08mm, 42.18mm, 42.28mm, 42.38mm, 42.48mm, 42.58mm, 42.68mm, 42.78mm, 42.88mm, 42.98mm, 43.08mm, 43.18mm, 43.28mm, 43.38mm, 43.48mm, 43.58mm, 43.68mm, 43.78mm, 43.88mm, 43.98mm, 44.08mm, 44.18mm, 44.28mm, 44.38mm, 44.48mm, 44.58mm, 44.68mm, 44.78mm, 44.88mm, 44.98mm, 45.08mm, 45.18mm, 45.28mm, 45.38mm, 45.48mm, 45.58mm, 45.68mm, 45.78mm, 45.88mm, 45.98mm, 46.08mm, 46.18mm, 46.28mm, 46.38mm, 46.48mm, 46.58mm, 46.68mm, 46.78mm, 46.88mm, 46.98mm, 47.08mm, 47.18mm, 47.28mm, 47.38mm, 47.48mm, 47.58mm, 47.68mm, 47.78mm, 47.88mm, 47.98mm, 48.08mm, 48.18mm, 48.28mm, 48.38mm, 48.48mm, 48.58mm, 48.68mm, 48.78mm, 48.88mm, 48.98mm, 49.08mm, 49.18mm, 49.28mm, 49.38mm, 49.48mm, 49.58mm, 49.68mm, 49.78mm, 49.88mm, 49.98mm, 50.08mm, 50.18mm, 50.28mm, 50.38mm, 50.48mm, 50.58mm, 50.68mm, 50.78mm, 50.88mm, 50.98mm, 51.08mm, 51.18mm, 51.28mm, 51.38mm, 51.48mm, 51.58mm, 51.68mm, 51.78mm, 51.88mm, 51.98mm, 52.08mm, 52.18mm, 52.28mm, 52.38mm, 5
-----------	---

Property :

- **Extremely high safety:** The PVB interlayer withstands penetration from impact
- **Energy-saving building material:** PVB interlayer impedes the transmission of solar heat and reduces cooling loads.
- **Create aesthetic sense to building:** Laminated glass with a tinted interlayer will beautify the buildings and harmonize their appearances with surrounding views which meet the demand of architects.
- **Sound control:** PVB interlayer is an effective absorber of sound.
- **Ultraviolet screening:** The interlayer filters out ultraviolet rays and prevents the furniture and curtains to fading effect.

Clear laminated glass:




Curved laminated glass :



Laminated glass application :

Because of its strength and safety features, laminated glass is preferred when any of the following are required:

- Hurricane and impact resistance
- Bombardment against bombs or other explosions
- Ground-shock resistance
- Bombardment against forced entry
- Glass break or shatter
- Protection from fallout of broken glass from building facade
- Earthquake resistance
- Protection from "smash and grab" thefts from storefront windows
- Bullet resistance

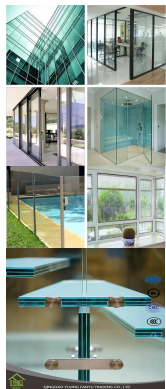

Packing & Delivery :

Packing : See worthy wooden crates with paper between each two glass pieces, or customized as you need



Delivery : Clear laminated glass can be shipped within 30 days after receiving your deposit of TT or LC.



FAQ:

- What is your minimum order quantity?
Our MOQ is 1-2000. Products of different sizes and specifications could be mixed in one container.
- Is your company a manufacturer or trading company?
We are a manufacturer of glass and mirror products, and we have our own factory and advanced production lines.
- Can I get samples to check your quality?
Yes, samples can be provided for your reference.
- Can you do the production as customized?
Yes, we can produce products according to your requirements.

Contact us

SALES MANAGER : SIRI YANG



Shi, Yang5?



+06 18662552050



0151-0849(200005)22:5;1-10



+00 18662658266



22472562



li4.you@pulsar.com.cn